


Panel Replacement

B: INSTALLATION

• RH

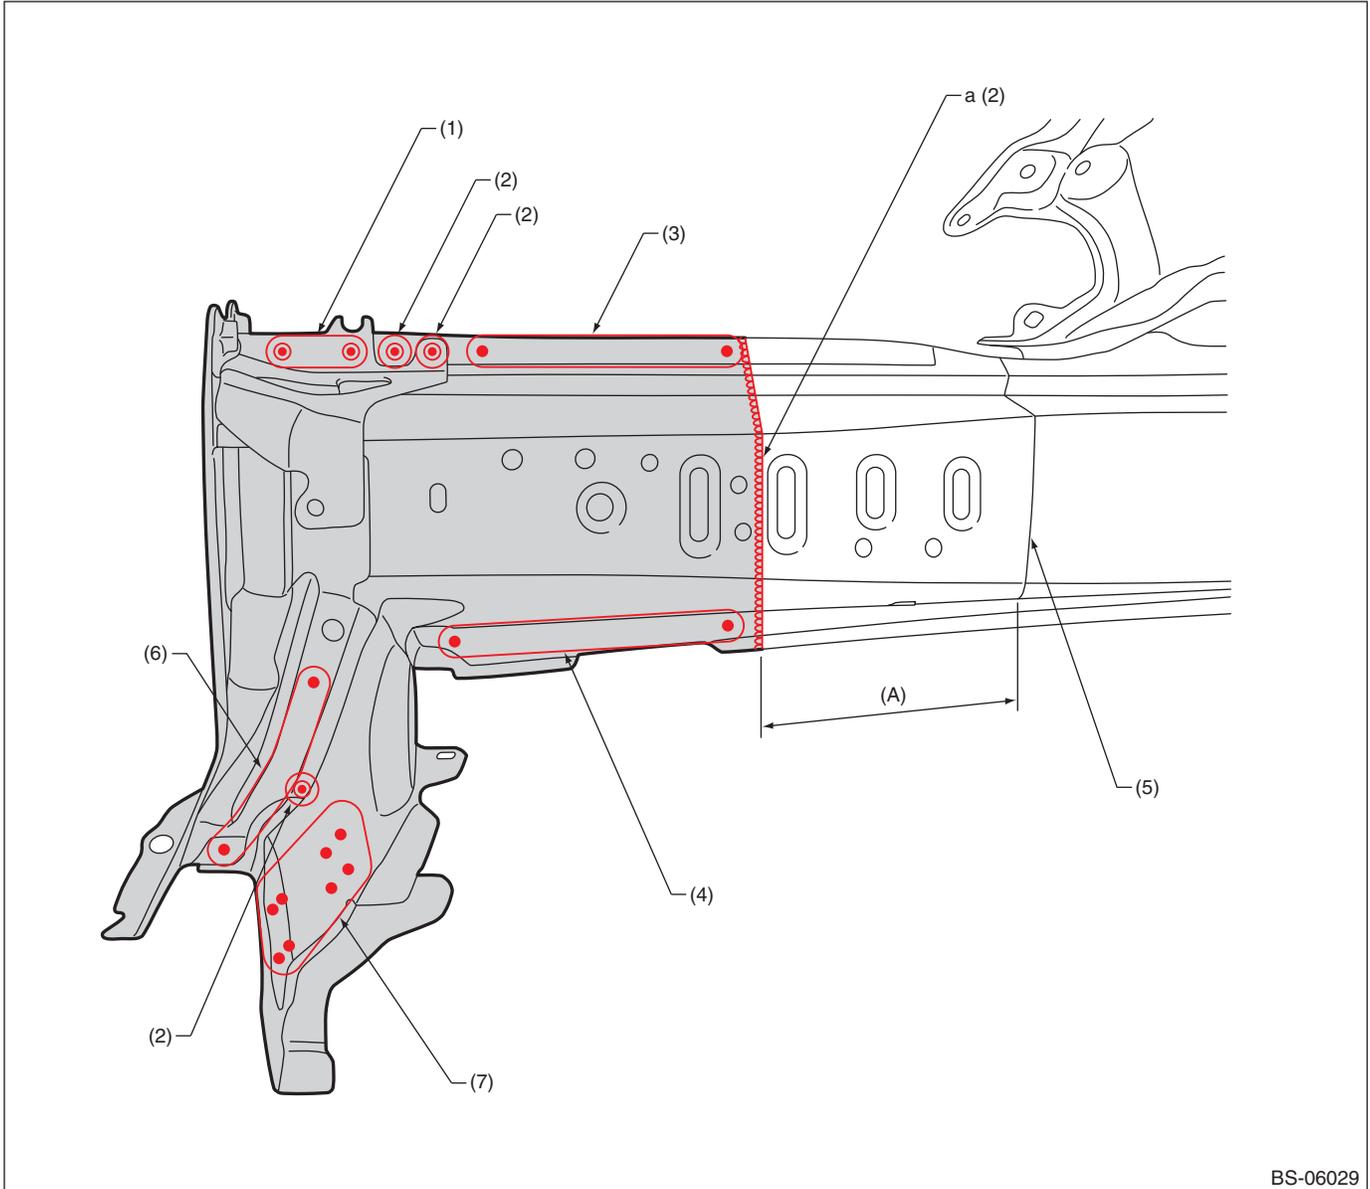

(A) 120 mm (4.72 in)

(1) 2 points

(2) 1 point

(3) 7 points

(4) 6 points

(5) Tailored line

(6) 4 points

(7) 8 points

For part marked by "a": Anticorrosion wax shall be applied thoroughly on the back side of continuous welding portion.